


Reach your goal at lightning speed!

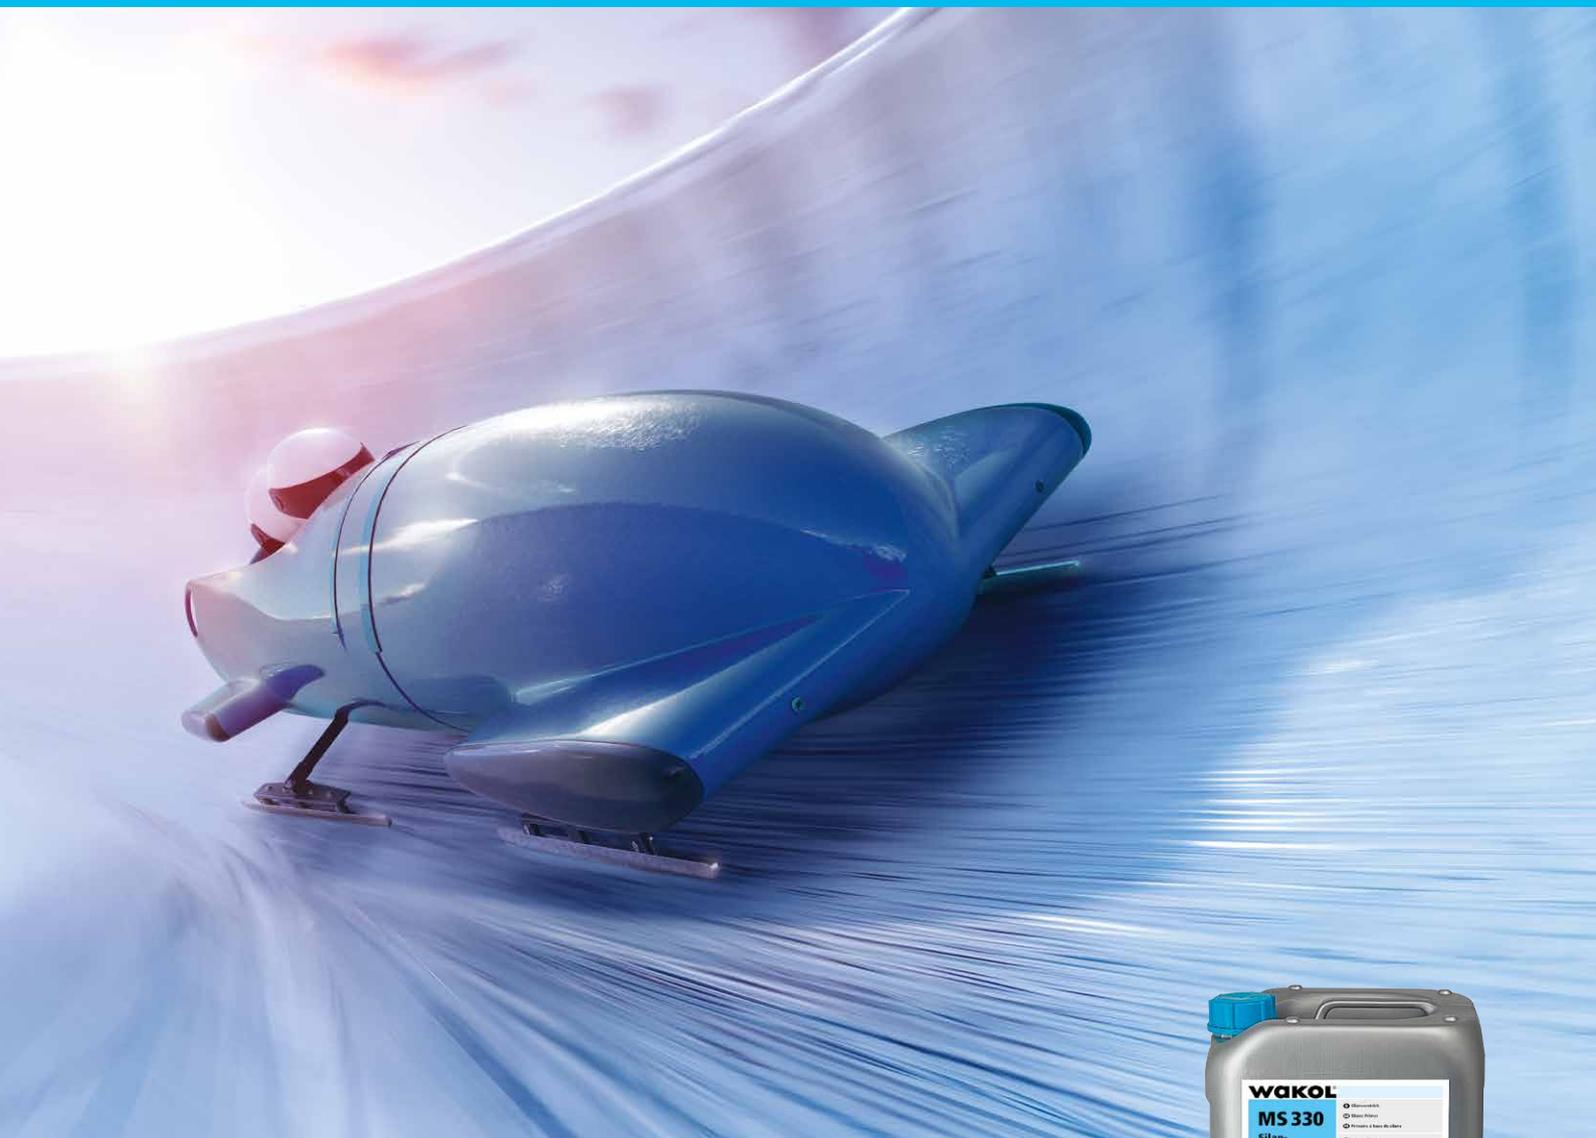

WAKOL MS 330 Silane Primer

Fast – moisture barrier in just one step

Extremely fast – return to work after 60 minutes

Universal – can be applied with roller and trowel

Economic – 1-component, no mixing, no residual amounts

Product:



WAKOL®
Anspruch verbindet

WAKOL MS 330 Silane Primer – fastest moisture barrier



First MS Polymer moisture barrier with drying time under one hour

After only 60 minutes' drying time the subfloor is protected against increased residual moisture with WAKOL MS 330 Silane Primer. In just one step a moisture barrier up to 5 CM% or 95 % KRL is achieved, on heated subfloors up to 3 CM% or 85 % KRL. The parquet can already be laid after 60 minutes. This saves you additional journeys.

Preferred method of application for the perfect result

WAKOL MS 330 Silane Primer can be applied both with WAKOL MS Special Roller and TKB A2 trowel. Both variants guarantee economical working whilst observing the required application amount of approx. 250 g/m² in just one application as a moisture barrier. As a solidifying primer, one application of 120 g/m² is sufficient when applied with a WAKOL Primer Roller, 11 mm.

Diverse application for subfloor preparation

Overcome all challenges with WAKOL MS 330 Silane Primer, whether as a primer, solidifying agent for subfloors or as a moisture barrier. Can be used as a primer on new and old subfloors, firmly fixed adhesive residue, absorbent and non-absorbent subfloors. Stressed screeds are solidified with WAKOL MS 330 Silane Primer. Old adhesive residue is blocked in order to reliably prevent any interaction with the newly applied flooring products. Increased residual moisture in unheated cement subfloors can be blocked safely and quickly.

Universal for subsequent installation of parquet and floor covering

There is a variety of possibilities available after applying the WAKOL MS 330 Silane Primer. You can install parquet directly on the primer using all Wakol MS adhesives. If you want to lay textile



or resilient flooring, an initial coating with WAKOL D 3045 Special Primer and subsequent levelling with a minimum layer thickness of 2 mm is sufficient. When time is the essence and you want to install the flooring on the same day, reach for WAKOL Z 715 Quick Setting Levelling Compound.

Efficient

As a 1-component product, annoying and inconvenient mixing is not required when using the WAKOL MS 330 Silane Primer. This means you do not need a stirring tool or power on the construction site, you do not get annoyed over dirty stirring tools, or time lost due to the mixing process. Mixing errors are also a thing of the past. You do not have to observe any pot times and do not lose money due to hardened residual amounts, which are unavoidable with 2-component products.

Extremely fast product – tried-and-tested operation

Today the market for parquet adhesives is dominated by modern MS products. Now WAKOL MS 330 Silane Primer offers a moisture barrier with a drying time of only one hour in the system with Wakol MS parquet adhesives. You can continue to use your normal working methods in the MS system. The product is solvent-free according to TRGS 610, label-free and classified as very low emissions according to EMICODE EC1 PLUS .

Please always observe the technical information before processing.