

WAKOL Z 630 Levelling Compound



Area of application:

Self-levelling, cement-based levelling compound for treating unevenness in layer thicknesses of 1 to 15 mm unextended, extended from 10 to 25 mm under textile flooring and elastic flooring indoors. As of 2 mm layer thickness also underneath parquet. Can be processed in combination with WAKOL D 3060 Plastification Additive. Can be applied with a rakel. Can be pumped. Low in chromate according to REACH.

Mixture:

approx. 6.25-6.5 l water + 25 kg Z 630

Consumption:

approx. 1.5 kg/m²/mm application thickness

Setting time:

suitable for walking after approx. 2h; ready for laying up to 3 mm after 6 h; up to 5 mm after 12 h; up to 10 mm after 24 h; up to 15 mm after 48 h; up to 25 mm extended after 48 h

Pot life:

approx. 25 minutes

extended:

10-25 mm

unextended:

1-15 mm

Storage information:

store in a cool and dry place

Base:

special cement

CE marking:

EN 13813: CT-C40-F7

Order information:

506422 | 41665 - 25.0 kg - pallet: 42 pieces

WAKOL Z 645 Filling Compound, dust-reduced



Area of application:

Dust-reduced, stable, cement-based levelling compound for treating unevenness in layer thicknesses of 1 to 10 mm unextended, extended from 10 to 50 mm for rough smoothing of uneven areas, smoothing steps and door joints and for repairing concrete subfloor damage indoors. Can be processed in combination with WAKOL D 3060 Plastification Additive. Flexible. Very good moldability. Low in chromate according to REACH.

Mixture:

approx. 6.75-8.0 l water + 25 kg Z 645

Consumption:

approx. 1.3 kg/m²/mm application thickness

Setting time:

suitable for walking after approx. 30 min.; ready for laying after approx. 60 min.

Pot life:

approx. 15 minutes

extended:

10-50 mm

unextended:

1-10 mm

Storage information:

store in a cool and dry place

Base:

special cement

CE marking:

EN 13813: CT-C30-F7

Order information:

506722 | 41371 - 25.0 kg - pallet: 40 pieces

WAKOL RS 5945 Edging Strips




Area of application:
Permanently elastic edge strips with self-adhesive pedestal to be used if thicker levelling layers are required and before installation of WAKOL Z 515 Thin Screed and WAKOL Z 560 Rapid Screed.

Storage information:
not sensitive to frost

Base:
polyethylene

Order information:
594503 | 41706 - Roll 25 m, 50 mm wide, 5 mm thick - pallet: 48 pieces; 12 boxes with 4 pieces each

WAKOL Raker Blade

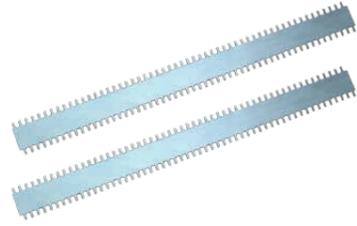

Area of application:
Raker blade notched on both sides, made from hardened steel, used in WAKOL Raker or WAKOL Raker with distance pins, 56 cm. WAKOL Raker Blade is available in width of 56 cm and in the notch size TKB R2.

Base:
steel

Order information:
598033 | 41386 - 10 pcs. TKB R4 56 cm - 1 box with 10 pieces each
598032 | 41384 - 10 pcs. TKB R3 56 cm - 1 box with 10 pieces each

WAKOL PU 272 Artificial Turf Adhesive



Area of application:
2-component, green coloured PU adhesive for laying artificial turf on polyester seam tape, on absorbent and non-absorbent subfloors as well as moist, but superficially dried, drainable subfloors outdoors.

Application method:
trowel notch size according to TKB B3 or B11

Storage information:
not below +5 °C, sensitive to frost

Consumption:
approx. 850-1200 g/m²

Base:
polyurethane resin

Airing time:
none

Open time:
approx. 90 minutes

Order information:
368812 | 41343 - 12.0 kg A-comp. - pallet: 44 pieces
369412 | 41344 - 1.12 kg B-Comp. - pallet: 440 pieces; 40 boxes with 11 pieces each

WAKOL AS 130 Seaming Tape



Area of application:
Polyester fleece tape for bonding artificial grass sheets with each other in joint sections indoors and outdoors.

Laying:
in the system with WAKOL PU 272

Consumption:
corresponding to the joint length

Storage information:
not sensitive to frost

Base:
polyester fleece

Order information:
595612 | 41374 - Roll 100 m, 300 mm wide - pallet: 80 pieces; 16 boxes with 5 pieces each

WAKOL KB 185 Skirting Adhesive Tape, 55 mm



Area of application:
Tape, on both sides with strong adhesive covered, with yarn core for bonding looped carpet skirting board with different backing formats, soft skirting (up to 60 mm) and rubber skirting (up to 60 mm) indoors.

Storage information:
not sensitive to frost

Base:
polyacrylate with yarn core

Order information:
595710 | 41671 - Roll 50 m, 55 mm wide, 0,23 mm thick - pallet: 300 pieces; 60 boxes with 5 pieces each

WAKOL KB 183 Skirting Adhesive Tape, 35 mm



Area of application:
Tape, on both sides with strong adhesive covered, with yarn core for bonding solid core skirting, carpet skirting, textile and needle-punch flooring skirting and soft skirting (up to 50 mm) indoors.

Storage information:
not sensitive to frost

Base:
polyacrylate with yarn core

Order information:
595711 | 41703 - Roll 50 m, 35 mm wide, 0,38 mm thick - pallet: 480 pieces; 60 boxes with 8 pieces each

WAKOL EM 140 Uncoupling Fleece



Area of application:
Light green polyester fleece for decoupling and low tension reinforcement under bonded parquet indoors also appropriate for applying a levelling layer before bonding textile and elastic flooring.

Laying:
completely cover, with sheets closely abutting one another

Consumption:
corresponding to the room size

Storage information:
store roll upright, not sensitive to frost

Base:
polyester fleece

Order information:
590303 | 41705 - Roll 50 m, 1 m wide, 1,1 mm tick - pallet: 12 pieces

WAKOL Double Paddle Mixer



Area of application:
Double paddle mixer with diameter of 90 mm for the fast and homogeneous mixing of plasticised levelling compound and 2-component PU adhesives.

Base:
steel

Order information:
592315 | 41704 - 1 piece - pallet: 224 pieces

WAKOL AS 155 Sealing Collar, small



Area of application:

Polyethylene foil on both sides laminated with polypropylene fleece for feedthrough of water pipes with 15-30 mm diameter.

Laying:

glued over the entire surface, in the system with WAKOL AS 151

Consumption:

1 pc. per feedthrough

Storage information:

not sensitive to frost

Base:

polypropylene fleece

Order information:

595606 | 41666 - 5 pieces - each 140 x 140 mm - pallet: 500 pieces; 100 boxes with 5 pieces each

WAKOL AS 156 Sealing Collar, large



Area of application:

Polyethylene foil on both sides laminated with polypropylene fleece for feedthrough of water pipes with 65-200 mm diameter.

Laying:

glued over the entire surface, in the system with WAKOL AS 151

Consumption:

1 pc. per feedthrough

Storage information:

not sensitive to frost


Base:

polypropylene fleece

Order information:

595607 | 41667 - 5 pieces - each 425 x 425 mm - pallet: 1.000 pieces; 200 boxes with 5 pieces each

WAKOL AS 157 Stretch Collar

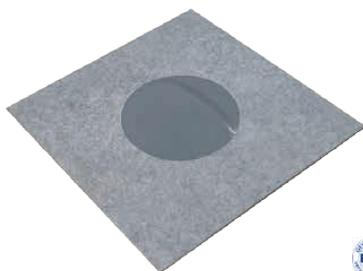

Area of application:

Polyethylene foil on both sides laminated with polypropylene fleece for feedthrough of water pipes with 40-65 mm diameter.

Laying:

glued over the entire surface, in the system with WAKOL AS 151

Consumption:

1 pc. per feedthrough

Storage information:

not sensitive to frost

Base:

polypropylene fleece

Order information:

595608 | 41668 - 5 pieces - each 150 x 150 mm - pallet: 500 pieces; 100 boxes with 5 pieces each

WAKOL AS 158 Sealing Ring



Area of application:

Butyl rubber with silicone paper covering on both sides for floor drains with diameter of 125 mm.

Laying:

in the system with WAKOL AS 151

Consumption:

1 pc. per drain

Storage information:

not sensitive to frost

Base:

butyl rubber

Order information:

595609 | 41670 - 5 pieces - each 100 mm x 200 mm (inner diameter x outer diameter) - pallet: 500 pieces; 100 boxes with 5 pieces each